



Version
02.01

November
2006

Signal Generator R&S®SMA100A

Specifications

CONTENTS

KEY FEATURES	3
SPECIFICATIONS	4
RF CHARACTERISTICS	4
<i>Frequency</i>	4
<i>Frequency sweep</i>	4
<i>Reference frequency</i>	4
<i>Level</i>	5
<i>Level sweep</i>	6
<i>Spectral purity</i>	7
<i>LIST mode</i>	10
ANALOG MODULATION	10
<i>Possible modulation types</i>	10
<i>Simultaneous modulation</i>	10
<i>Amplitude modulation</i>	10
<i>Frequency modulation</i> (option R&S SMA-B20 or R&S SMA-B22)	10
<i>Phase modulation</i> (option R&S SMA-B20 or R&S SMA-B22)	11
<i>Pulse modulation</i>	12
<i>Input for external modulation signals</i>	12
MODULATION SOURCES	13
<i>Internal modulation generator</i>	13
<i>Standard pulse generator</i>	13
<i>High-performance pulse generator</i> (option R&S SMA-K23)	13
<i>Multifunction generator</i> (option R&S SMA-K24)	14
<i>VOR modulation signal</i> (option R&S SMA-K25)	14
<i>ILS modulation signal</i> (option R&S SMA-K25)	15
<i>Marker Beacon (MKR BCN)</i> (option R&S SMA-K25)	15
<i>ADF mode</i> (option R&S SMA-K25)	16
CLOCK SYNTHESIZER (OPTION R&S SMA-B29)	16
GENERAL DATA	17
REMOTE CONTROL	17
OPERATING DATA	18
ORDERING INFORMATION	19

Key features

Excellent signal quality

- Very low SSB phase noise of typ. -135 dBc (20 kHz carrier offset, $f = 1$ GHz, 1 Hz measurement bandwidth), typ. -140 dBc with the Enhanced Phase Noise Performance option (R&S SMA-B22)
- Wideband noise of typ. -160 dBc (>10 MHz carrier offset, $f = 1$ GHz, 1 Hz measurement bandwidth)
- Nonharmonics of typ. -100 dBc (>10 kHz carrier offset, $f < 1500$ MHz, with the R&S SMA-B22 option)
- High-stability reference oscillator as standard
- Very low phase noise at low frequencies due to internal division of the fundamental frequency range (750 MHz to 1500 MHz) down to 6.6 MHz

Ideal for use in production

- Very short frequency and level setting times of <3 ms across the entire frequency and level range, <450 μ s in list mode
- Fast hopping mode with flexibly addressable frequency and level pairs, as fast as normal list mode
- Frequency setting time of typ. <10 μ s within a bandwidth of up to 80 MHz due to direct access to the DDS-based synthesizer (with the R&S SMA-B20 or -B22 option)
- Very high level accuracy and repeatability
- High output power of up to +18 dBm, overrange up to +28 dBm
- Electronic attenuator with built-in overvoltage protection over entire frequency range
- Minimum space requirements due to compact size (only two height units)

Mil/Aero applications

- Pulse modulator with excellent characteristics (on/off ratio typ. 100 dB, rise/fall time typ. 10 ns)
- Pulse generator integrated as standard
- Optional high-performance pulse generator with minimum pulse width of 20 ns (R&S SMA-K23)
- Optional removable mass storage (compact flash disk, R&S SMA-B80)
- Optional VOR/ILS modulation (R&S SMA-K25)
- Optional operating altitude up to 4600 m (R&S SMA-B46)

All-purpose instrument

- Frequency range of 9 kHz to 3 GHz (R&S SMA-B103/-B103L) or 6 GHz (R&S SMA-B106/-B106L)
- Frequency, level and LF sweeps
- AM, broadband FM/ ϕ M (R&S SMA-B20 or -B22), pulse modulation
- Built-in LF generator up to 1 MHz, optional multifunction generator (R&S SMA-K24) up to 10 MHz
- Optional low-jitter clock synthesizer up to 1.5 GHz (R&S SMA-B29)

Intuitive operating concept

- Color display with 320×240 pixels ($\frac{1}{4}$ VGA)
- Intuitive user interface with graphical display of signal flow (block diagram)
- Context-sensitive online help

Versatile interfaces

- Remote control via GPIB or LAN
- USB connectors (e.g. for keyboard, mouse, memory stick)
- Connector for R&S NRP power sensors for precise power measurements
- Selectable SCPI- or 8662A/63A-compatible IEC/IEEE bus command set
- Control via remote operation tool (e.g. VNC)

Specifications

Specifications apply under the following conditions:

30 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to, and total calibration performed. Data designated "overrange" or "underrange" and data without tolerance limits is not binding.

RF characteristics

Frequency

Range	R&S SMA-B103/-B103L R&S SMA-B106/-B106L	9 kHz to 3 GHz 9 kHz to 6 GHz
Resolution of setting		0.01 Hz
Resolution of synthesis	standard, fundamental frequency range 750 MHz to 1500 MHz with option R&S SMA-B22	5 µHz 0.2 µHz
Setting time	to within $<1 \times 10^{-7}$ for $f > 6.6$ MHz or <35 Hz for $f < 6.6$ MHz after IEC/IEEE bus delimiter in ALC OFF S&H mode after trigger pulse in LIST mode	<3 ms <5 ms <450 µs
Phase offset		adjustable in 0.1° steps

Frequency sweep

Operating modes	digital sweep in discrete steps	AUTOMATIC, STEP, SINGLE SWEEP, EXTERNAL SINGLE, EXTERNAL STEP, EXTERNAL START/STOP, MANUAL/EXTERNAL TRIGGER, LINEAR/LOGARITHMIC SPACING
Sweep range		full frequency range
Step width	linear logarithmic	full frequency range 0.01 % to 100 % per step
Dwell time	range resolution	10 ms to 10 s 0.1 ms

Reference frequency

Aging	after 30 days of uninterrupted operation with option R&S SMA-B22	$<1 \times 10^{-9}/\text{day}$, $<1 \times 10^{-7}/\text{year}$ $<5 \times 10^{-10}/\text{day}$, $<3 \times 10^{-8}/\text{year}$
Temperature effect	in temperature range 0 °C to +50 °C with option R&S SMA-B22	$<6 \times 10^{-8}$ $<6 \times 10^{-9}$
Warm-up time	to nominal thermostat temperature	≤ 10 min
Output for internal reference signal	frequency (approx. sinewave) level source impedance	10 MHz or external input frequency typ. 5 dBm 50 Ω
Input for external reference	frequency maximum deviation input level, limits recommended input impedance	5 MHz, 10 MHz or 13 MHz 3×10^{-6} ≥ -6 dBm, ≤ 19 dBm 0 dBm to 19 dBm 50 Ω
Electronic tuning from input (EXT. TUNE)	sensitivity input voltage input impedance with option R&S SMA-B22	typ. $4 \times 10^{-9}/\text{V}$ to $3 \times 10^{-8}/\text{V}$ -10 V to +10 V typ. 10 kΩ typ. 5 kΩ

Level

The R&S SMA100A has three different modes for level setting:

NORMAL mode: In this mode, the attenuator switches without wear and tear due to the exclusive use of electronic switches. The maximum specified level depends on the set frequency (see table below). A typical level overrange up to +20 dBm is available.


HIGH POWER mode: In this mode, the electronic attenuator is bypassed with mechanical relays for high output power (up to typ. 28 dBm overrange). The relays are not switched over in this mode. The typical minimum level is -11 dBm.

AUTO mode: In this mode, the mechanical relay bypass is switched automatically if the set level is higher than the specified max. level in the mode NORMAL. The output level is specified over the full range from -120 dBm up to +18 dBm (+15 dBm for R&S SMA-B106).


The R&S SMA100A is also available without attenuator (option R&S SMA-B103L and R&S SMA-B106L).

Setting range	with electronic attenuator (option R&S SMA-B103/-B106) without attenuator (option R&S SMA-B103L/-B106L)	-145 dBm to +30 dBm -20 dBm to +30 dBm
Specified level range with R&S SMA-B103/-B106 frequency option	NORMAL mode 100 kHz < f ≤ 250 kHz 250 kHz < f ≤ 3 GHz f > 3 GHz AUTO mode 100 kHz < f ≤ 30 MHz 30 MHz < f ≤ 3 GHz f > 3 GHz	-120 dBm to +11 dBm (PEP) ¹ -120 dBm to +13 dBm (PEP) -120 dBm to +9 dBm (PEP) -120 dBm to +16 dBm (PEP) -120 dBm to +18 dBm (PEP) -120 dBm to +15 dBm (PEP)
Specified level range with R&S SMA-B103L/-B106L frequency option	AUTO mode 100 kHz < f ≤ 30 MHz 30 MHz < f ≤ 3 GHz f > 3 GHz	+12 dBm to +17 dBm (PEP) +12 dBm to +19 dBm (PEP) +10 dBm to +17 dBm (PEP)
Resolution		0.01 dB
Level uncertainty	ALC state on, attenuator mode AUTO temperature range +18 °C to +33 °C 100 kHz < f ≤ 3 GHz f > 3 GHz	<0.5 dB <0.9 dB
Additional uncertainty with ALC OFF, S&H	this mode is only needed with pulse modulation, after "search once"	<0.3 dB
Output impedance VSWR in 50 Ω system with R&S SMA-B103/-B106 frequency option	NORMAL mode, ALC state on 6.6 MHz < f ≤ 3 GHz f > 3 GHz	<1.65, typ. <1.35 <1.9, typ. <1.65
	HIGH POWER mode, ALC state on 6.6 MHz < f ≤ 3 GHz f > 3 GHz	<1.75, typ. <1.6 <1.9, typ. <1.7
Output impedance VSWR in 50 Ω system with R&S SMA-B103L/-B106L frequency option	without attenuator, ALC state on 6.6 MHz < f ≤ 3 GHz f > 3 GHz	<1.9, typ. <1.7 <2.3, typ. <2.0
Setting time	after IEC/IEEE bus delimiter, with GUI update stopped, attenuator mode AUTO temperature range +18 °C to +33 °C, to <0.1 dB deviation from final value ALC state ON ALC state OFF in LIST mode after trigger impulse to <0.3 dB deviation from final value relay switchover in AUTO mode	<3 ms <5 ms <450 μs <10 ms
Uninterrupted level setting	with attenuator mode FIXED; ALC state on setting range	>20 dB
Back-feed (from ≥50 Ω source) with R&S SMA-B103/-B106	maximum permissible RF power in output frequency range of RF path for f > 1 MHz 1 MHz < f ≤ 3 GHz 3 GHz < f < 6 GHz maximum permissible DC voltage	50 W 10 W 50 V
Back-feed (from ≥50 Ω source) with R&S SMA-B103L/-B106L	maximum permissible RF power in output frequency range of RF path for f > 1 MHz maximum permissible DC voltage	0.05 W 5 V

¹ PEP = peak envelope power.

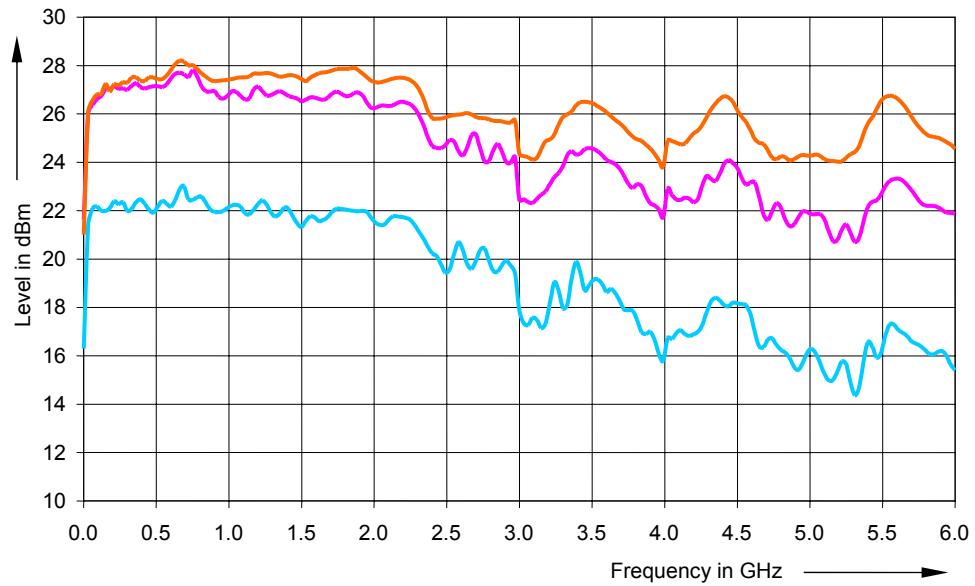

Maximum available power, attenuator mode NORMAL (lower trace) or "high power" (middle trace) and without attenuator (upper trace)

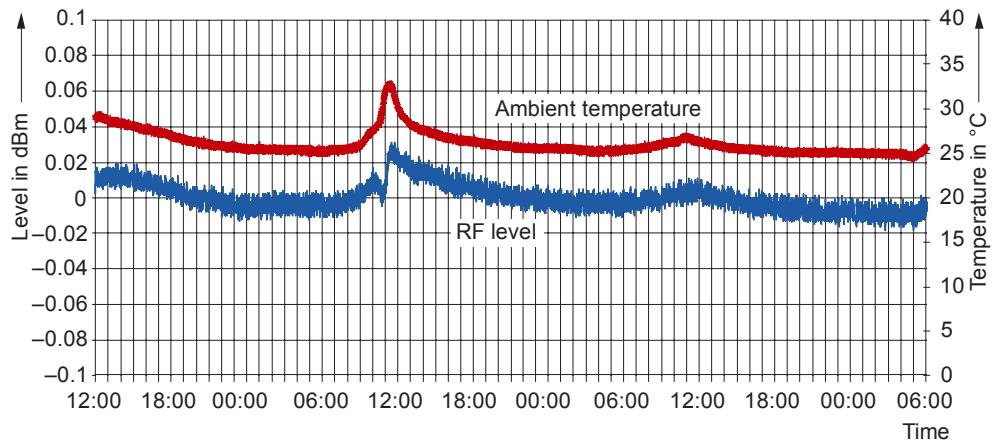

R&S SMA100A level repeatability at 2.1 GHz, 0 dBm, ALC ON

Level sweep


Digital sweep in discrete steps	operating modes sweep range uninterrupted level sweep step width sweeping in AUTO mode The relais switching threshold should not be crossed during sweep. Sweeping is therefore inhibited in this level setting mode.	AUTOMATIC, STEP, SINGLE SWEEP, EXTERNAL SINGLE, EXTERNAL STEP, EXTERNAL START/STOP, MANUAL/EXTERNAL TRIGGER, LINEAR SPACING full level range 0.1 dB to 30 dB 0.1 dB to 20 dB per step
---------------------------------	---	--

Spectral purity


Harmonics	for $f > 1$ MHz; CW with R&S SMA-B103/-B106 AUTO/NORMAL mode, level ≤ 9 dBm HIGH POWER mode, level ≤ 14 dBm with R&S SMA-B103L/-B106L levels ≤ 15 dBm	<-30 dBc <-30 dBc <-30 dBc
Nonharmonics	CW, level >-10 dBm, offset >10 kHz from carrier $f \leq 1500$ MHz 1500 MHz $< f \leq 3$ GHz $f > 3$ GHz offset >850 kHz from carrier $f \leq 1500$ MHz 1500 MHz $< f \leq 3$ GHz $f > 3$ GHz	<-80 dBc <-74 dBc <-68 dBc <-86 dBc <-80 dBc <-74 dBc
Nonharmonics with option R&S SMA-B22	CW, level >-10 dBm offset >10 kHz from carrier $f \leq 750$ MHz 750 MHz $< f \leq 1500$ MHz 1500 MHz $< f \leq 3$ GHz $f > 3$ GHz	<-96 dBc <-90 dBc <-84 dBc <-78 dBc
Subharmonics	$f \leq 1500$ MHz $f > 1500$ MHz	none <-74 dBc
Wideband noise	attenuator mode AUTO for level > 10 dBm with R&S SMA-B10xL for level > 5 dBm with R&S SMA-B10x carrier offset >10 MHz, measurement bandwidth 1 Hz, CW 9 kHz $\leq f \leq 6.6$ MHz 6.6 MHz $< f \leq 750$ MHz 750 MHz $< f \leq 1500$ MHz 1.5 GHz $< f \leq 3$ GHz $f > 3$ GHz	<-147 dBc, typ. -150 dBc <-152 dBc, typ. -156 dBc <-153 dBc, typ. -160 dBc <-150 dBc, typ. -155 dBc <-148 dBc, typ. -152 dBc
SSB phase noise	carrier offset 20 kHz, measurement bandwidth 1 Hz, CW $f \leq 6.6$ MHz $f = 100$ MHz $f = 1$ GHz $f = 2$ GHz $f = 3$ GHz $f = 4$ GHz $f = 6$ GHz	<-141 dBc, typ. -145 dBc <-147 dBc, typ. -151 dBc <-131 dBc, typ. -135 dBc <-125 dBc, typ. -129 dBc <-121 dBc, typ. -125 dBc <-119 dBc, typ. -123 dBc <-115 dBc, typ. -119 dBc
SSB phase noise with option R&S SMA-B22	CW, carrier offset 20 kHz, measurement bandwidth 1 Hz $f \leq 6.6$ MHz $f = 100$ MHz $f = 1$ GHz $f = 2$ GHz $f = 3$ GHz $f = 4$ GHz $f = 6$ GHz	<-145 dBc, typ. -148 dBc <-151 dBc, typ. -154 dBc <-136 dBc, typ. -140 dBc <-130 dBc, typ. -134 dBc <-126 dBc, typ. -130 dBc <-123 dBc, typ. -126 dBc <-120 dBc, typ. -124 dBc

Carrier frequency in MHz	typical phase noise in dBc (1 Hz) with option R&S SMA-B22							
	frequency offset from carrier							
	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz
0.1 to 6.6	-83	-107	-121	-141	-151	-152	-155	-
6.6 to 15.625	-100	-124	-135	-158	-165	-165	-165	-165
15.625 to 23.4375	-96	-120	-131	-156	-165	-165	-165	-165
23.4375 to 31.25	-94	-118	-129	-154	-162	-162	-162	-162
31.25 to 46.875	-90	-114	-125	-150	-160	-160	-162	-162
46.875 to 62.5	-88	-112	-123	-149	-158	-158	-162	-162
62.5 to 93.75	-84	-108	-119	-145	-157	-157	-162	-162
93.75 to 125	-82	-106	-117	-144	-155	-155	-161	-162
125 to 187.5	-78	-102	-113	-141	-150	-150	-157	-157
187.5 to 250	-76	-100	-111	-139	-149	-148	-157	-157
250 to 375	-72	-96	-107	-136	-147	-147	-156	-157
375 to 500	-70	-94	-105	-134	-144	-143	-154	-157
500 to 750	-66	-90	-101	-130	-142	-140	-153	-156
750 to 1000	-64	-88	-99	-128	-138	-137	-150	-162
1000 to 1500	-60	-84	-95	-124	-137	-135	-149	-162
1500 to 2000	-58	-82	-93	-122	-132	-131	-144	-157
2000 to 3000	-54	-78	-88	-118	-131	-129	-143	-157
3000 to 4000	-52	-76	-86	-116	-127	-126	-129	-157
4000 to 6000	-48	-72	-82	-112	-125	-123	-124	-154


RMS jitter	carrier frequency 1 GHz 155 MHz 622 MHz 2.488 GHz	RMS jitter bandwidth 1 Hz to 10 MHz 100 Hz to 1.5 MHz 1 kHz to 5 MHz 5 kHz to 15 MHz	typ. 430 fs (430 µUI) typ. 60 fs (9 µUI) typ. 36 fs (22 µUI) typ. 22 fs (55 µUI)
RMS jitter with option R&S SMA-B22	carrier frequency 1 GHz 155 MHz 622 MHz 2.488 GHz	RMS jitter bandwidth 1 Hz to 10 MHz 100 Hz to 1.5 MHz 1 kHz to 5 MHz 5 kHz to 15 MHz	typ. 135 fs (135 µUI) typ. 42 fs (6.5 µUI) typ. 21 fs (13 µUI) typ. 19 fs (47 µUI)
Residual FM	RMS value at f = 1 GHz 0.3 kHz to 3 kHz, weighted (ITU-T) 0.03 kHz to 23 kHz	<1 Hz <4 Hz	
Residual AM	RMS value (0.03 kHz to 20 kHz)	<0.02 %	

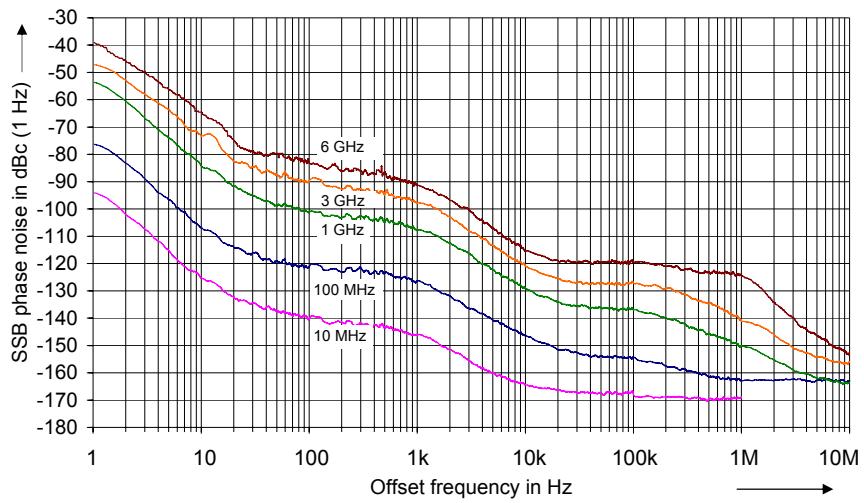

Typical SSB phase noise with internal reference oscillator (standard instrument)

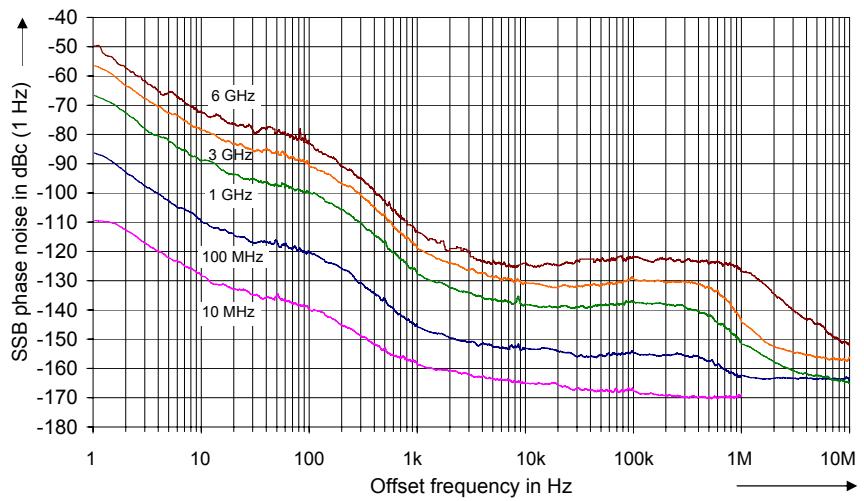

*Typical SSB phase noise with internal reference oscillator
(with Enhanced Phase Noise Performance and FM/φM Modulator R&S SMA-B22)*

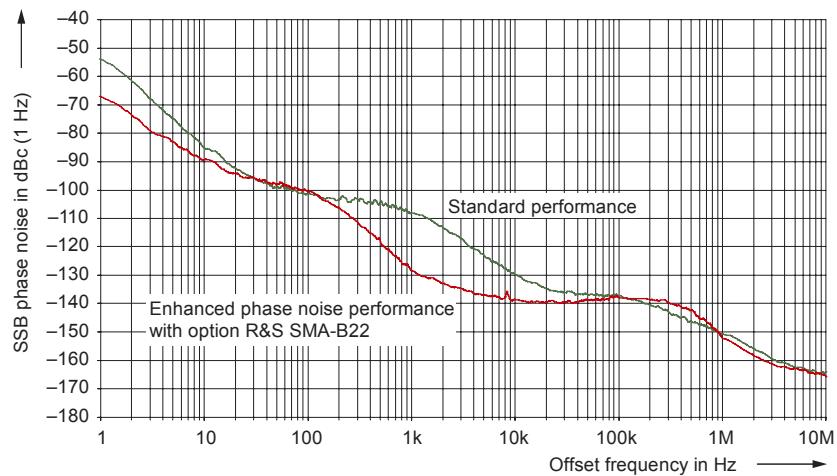

*Measured SSB phase noise, f = 1 GHz, comparison of standard performance
to performance with option R&S SMA-B22, typical values*

LIST mode

Frequency and level values can be stored in a list and set in an extremely short amount of time		
Operating modes		AUTOMATIC, SINGLE SWEEP, MANUAL/EXTERNAL TRIGGER fast hopping with immediate and external trigger
Max. number of stored settings		2000
Dwell time	resolution	1 ms to 1 s 0.1 ms
Setting time	after external trigger	see frequency and level data

Analog modulation

Possible modulation types

Amplitude modulation, frequency modulation, phase modulation, pulse modulation

Simultaneous modulation

	Amplitude modulation	Frequency modulation	Phase modulation	Pulse modulation
Amplitude modulation		+	+	-
Frequency modulation	+		-	+
Phase modulation	+	-		+
Pulse modulation	-	+	+	

+ = compatible, - = incompatible

Amplitude modulation

For $f \geq 100$ kHz, attenuator mode AUTO, level (PEP) within specified level range.

Operating modes		INTERNAL, EXTERNAL, INTERNAL + EXTERNAL, AC/DC
Modulation depth	at high levels, modulation is clipped when the maximum PEP is reached	0 % to 100 %
Resolution		0.1 %
Setting uncertainty	$f_{mod} = 1$ kHz and $m < 80$ %	<(3 % of reading + 1 %)
AM distortion	$f_{mod} = 1$ kHz $m = 30$ % $m = 80$ %	<1 % <2 %
Modulation frequency response	$m = 60$ %, up to 100 kHz	<3 dB
Incidental ϕ M at AM	$m = 30$ %, $f_{mod} = 1$ kHz, \pm peak/2	<0.1 rad

Frequency modulation (option R&S SMA-B20 or R&S SMA-B22)

FM multiplier for different frequency ranges	$f \leq 46.875$ MHz $f \leq 6.6$ MHz 6.6 MHz $< f \leq 11.71875$ MHz 11.71875 MHz $< f \leq 23.4375$ MHz 23.4375 MHz $< f \leq 46.875$ MHz 46.875 MHz $< f \leq 93.75$ MHz 93.75 MHz $< f \leq 187.5$ MHz 187.5 MHz $< f \leq 375$ MHz 375 MHz $< f \leq 750$ MHz 750 MHz $< f \leq 1500$ MHz 1500 MHz $< f \leq 3$ GHz $f > 3$ GHz	$rm = 0.5$ (all modes except LOW NOISE) $rm = 0.5$ (only in LOW NOISE mode) $rm = 1/128$ (only in LOW NOISE mode) $rm = 1/64$ (only in LOW NOISE mode) $rm = 1/32$ (only in LOW NOISE mode) $rm = 1/16$ $rm = 1/8$ $rm = 1/4$ $rm = 1/2$ $rm = 1$ $rm = 2$ $rm = 4$
Operating modes		INTERNAL, EXTERNAL, INTERNAL + EXTERNAL, AC/DC, EXTERNAL DIGITAL, FM mode NORMAL, FM mode LOW NOISE (with option R&S SMA-B22 only)
Maximum deviation	FM mode NORMAL FM mode LOW NOISE	$rm \times 10$ MHz $rm \times 100$ kHz

Resolution		<0.02 % of set deviation min. rm × 0.1 Hz
Setting uncertainty	$f_{mod} = 10 \text{ kHz}$, deviation ≤ half of max. deviation internal external	<(1.5 % of reading + 20 Hz) <(2 % of reading + 20 Hz)
FM distortion	$f_{mod} = 10 \text{ kHz}$, deviation = $rm \times 1 \text{ MHz}$	<0.1 %
Modulation frequency response	FM mode NORMAL DC/10 Hz to 100 kHz DC/10 Hz to 10 MHz FM mode LOW NOISE DC/10 Hz to 100 kHz	<0.5 dB <3 dB <3 dB
Synchronous AM	40 kHz deviation, $f_{mod} = 1 \text{ kHz}$ $f > 5 \text{ MHz}$ $f > 3 \text{ GHz}$	<0.1 % <0.2 %
Carrier frequency offset with FM DC	after FM offset calibration	<0.2 % of set deviation

Phase modulation (option R&S SMA-B20 or R&S SMA-B22)

φM Multiplier for different frequency ranges	$f \leq 46.875 \text{ MHz}$ $f \leq 6.6 \text{ MHz}$ $6.6 \text{ MHz} < f \leq 11.71875 \text{ MHz}$ $11.71875 \text{ MHz} < f \leq 23.4375 \text{ MHz}$ $23.4375 \text{ MHz} < f \leq 46.875 \text{ MHz}$ $46.875 \text{ MHz} < f \leq 93.75 \text{ MHz}$ $93.75 \text{ MHz} < f \leq 187.5 \text{ MHz}$ $187.5 \text{ MHz} < f \leq 375 \text{ MHz}$ $375 \text{ MHz} < f \leq 750 \text{ MHz}$ $750 \text{ MHz} < f \leq 1500 \text{ MHz}$ $1500 \text{ MHz} < f \leq 3 \text{ GHz}$ $f > 3 \text{ GHz}$	$rm = 0.5$ (all modes except LOW NOISE) $rm = 0.5$ (only in LOW NOISE mode) $rm = 1/128$ (only in LOW NOISE mode) $rm = 1/64$ (only in LOW NOISE mode) $rm = 1/32$ (only in LOW NOISE mode) $rm = 1/16$ $rm = 1/8$ $rm = 1/4$ $rm = 1/2$ $rm = 1$ $rm = 2$ $rm = 4$
Operating modes		INTERNAL, EXTERNAL, INTERNAL + EXTERNAL, AC/DC, EXTERNAL DIGITAL, φM mode LOW NOISE, (with option R&S SMA-B22 only) φM mode HIGH DEVIATION, φM mode HIGH BANDWIDTH
Maximum deviation	φM mode LOW NOISE φM mode HIGH DEVIATION φM mode HIGH BANDWIDTH	$rm \times 0.25 \text{ rad}$ $rm \times 20 \text{ rad}$ $rm \times 1 \text{ rad}$
Resolution	φM mode LOW NOISE/HIGH DEVIATION φM mode HIGH BANDWIDTH	<0.02 % of set deviation, min. $rm \times 20 \mu\text{rad}$ <0.1 % of set deviation, min. $rm \times 20 \mu\text{rad}$
Setting uncertainty	$f_{mod} = 10 \text{ kHz}$, deviation ≤ half of max. deviation internal external	<(1.5 % of reading + 0.003 rad) <(2 % of reading + 0.003 rad)
Distortion	$f_{mod} = 10 \text{ kHz}$, half of max. deviation	<0.2 %, typ. 0.1 %
Modulation frequency response	φM mode HIGH DEVIATION deviation ≤ $rm \times 5 \text{ rad}$ DC/10 Hz to 500 kHz deviation > $rm \times 5 \text{ rad}$ DC/10 Hz to 10 kHz φM mode HIGH BANDWIDTH DC/10 Hz to 100 kHz DC/10 Hz to 10 MHz φM mode LOW NOISE DC/10 Hz to 100 kHz	<1 dB <1 dB <0.5 dB <3 dB <3 dB

Pulse modulation

Warning: When pulse modulation is activated, the ALC state of the R&S SMA100A is automatically changed to ALC OFF (sample&hold). In this state the ALC loop is opened and the output level is not regulated but the level modulator is set directly. In order to set the correct output level a sample&hold measurement is executed after each frequency or level setting.

In the following cases the nominal ON level is present for typ. 3 ms to 5 ms after level or frequency setting:

- a) No attenuator is fitted (frequency option R&S SMA-B103L/-B106L)
- b) in HIGH POWER mode
- c) in AUTO mode if the level is in the High Power range, i.e. the mechanical relay bypass is switched

Otherwise, the level is decreased by 30 dB during sample&hold measurement

Operating modes		external, internal
On/off ratio		>80 dB, typ. 100 dB
Rise/fall time	10 %/90 % of RF amplitude f > 180 MHz	20 ns, typ. 10 ns
Pulse repetition frequency		0 Hz to 10 MHz
Video crosstalk	spectral line of fundamental of 100 kHz squarewave modulation	<-30 dBc
Modulation input PULSE	input level input impedance polarity	threshold 0.8 V >10 kΩ or 50 Ω selectable

Input for external modulation signals

Modulation input AM EXT	input impedance input sensitivity (peak value for set modulation depth or deviation)	>100 kΩ 1 V
Modulation input PULSE	input level input impedance polarity	threshold 0.8 V >10 kΩ or 50 Ω selectable

With option R&S SMA-B20/-B22 (FM/φM)

Modulation input FM/φM EXT	input impedance input sensitivity (peak value for set modulation depth or deviation)	>100 kΩ or 50 Ω 1 V
----------------------------	--	------------------------

Modulation sources

Internal modulation generator

Frequency range		0.1 Hz to 1 MHz
Resolution of setting		0.1 Hz
Frequency accuracy		<0.005 Hz + relative deviation of reference frequency
Frequency response		<0.3 dB
Distortion	$f < 100 \text{ kHz}$ at $R_L > 50 \Omega$, level (V_{EMF}) < 1 V	<0.1 %
Output voltage	V_p at LF connector, open circuit voltage EMF resolution setting accuracy at 1 kHz	1 mV to 4 V 1 mV <(1 % of reading + 1 mV)
Output impedance		50 Ω
Frequency setting time	to within $<1 \times 10^{-7}$, after IEC/IEEE bus delimiter	<3 ms
Sweep	digital sweep in discrete steps operating modes sweep range step width (lin) step width (log)	AUTOMATIC, STEP, SINGLE SWEEP, EXTERNAL SINGLE, EXTERNAL STEP, EXTERNAL START/STOP, MANUAL/EXTERNAL TRIGGER, LINEAR/LOGARITHMIC SPACING full frequency range full frequency range 0.01 % to 100 % per step

Standard pulse generator

Pulse period	resolution	5 μs to 85 s 1 μs
Pulse width	resolution	2 μs to 1 s 1 μs
PULSE/VIDEO output		LVTTL signal ($R_L \geq 50 \Omega$)

High-performance pulse generator (option R&S SMA-K23)

Operating modes		AUTOMATIC, EXTERNAL TRIGGER, EXTERNAL GATE, SINGLE PULSE, DOUBLE PULSE, DELAYED PULSE (EXTERNAL TRIGGER)
Active trigger edge		positive or negative
Pulse period	resolution	100 ns to 85 s 20 ns
Pulse width	pulse width of double pulses is settable independently resolution	20 ns to 1 s 20 ns
Pulse delay	resolution	20 ns to 1 s 20 ns
Double-pulse spacing	resolution	20 ns to 1 s 20 ns
Uncertainty for pulse timing	generated digital; ensured by design	relative deviation of reference frequency
External trigger	delay jitter	typ. 50 ns <10 ns
PULSE/VIDEO output		LVTTL signal ($R_L \geq 50 \Omega$)

Multifunction generator (option R&S SMA-K24)

The multifunction generator option (R&S SMA-K24) consists of three function generators that can be set independently. Two of the three signal sources can be added with different weighting. The total voltage is limited by the maximum output voltage.

Waveforms	LF generator 1 LF generator 2 noise generator	sine sine, square, triangle user-programmable ramp $\Delta T = 20$ ns noise amplitude distribution Gaussian, equal
Frequency range	sine triangle, square noise amplitude distribution noise bandwidth	0.1 Hz to 10 MHz 0.1 Hz to 1 MHz Gaussian, equal 100 kHz to 10 MHz
Resolution of setting	sine, triangle, square ramp: rise, fall, low and high time	0.1 Hz 20 ns
Frequency uncertainty		<0.005 Hz + relative deviation of reference frequency
Frequency response	sine up to 1 MHz up to 10 MHz	<0.3 dB <1 dB
Distortion	f < 100 kHz at $R_L > 50 \Omega$, level (V_{EMF}) 1 V	<0.1 %
Output voltage	V_p at LF connector, open circuit voltage EMF resolution setting accuracy at 1 kHz	1 mV to 4 V 1 mV <(1 % of reading + 1 mV)
Output impedance		50 Ω
Frequency setting time	to within $<1 \times 10^{-7}$, after IEC/IEEE bus delimiter	<3 ms
Sweep	operating modes sweep range step width (lin) step width (log)	digital sweep in discrete steps AUTOMATIC, STEP, SINGLE, EXTERNAL SINGLE, EXTERNAL STEP, MANUAL/EXTERNAL TRIGGER, LINEAR/LOGARITHMIC SPACING full frequency range full frequency range 0.01 % to 100 % per step

VOR modulation signal (option R&S SMA-K25)

Attenuator mode AUTO.

VOR specification valid for carrier frequency range from 108 MHz to 118 MHz

VOR operating modes	NORM VAR subcarrier subcarrier + FM	VOR signal + COM/ID tone (can be switched off) 30 Hz VAR tone 9.96 kHz carrier, unmodulated 9.96 kHz carrier, modulated
Modulation tones 30 Hz (VAR, REF) 9.96 kHz FM carrier 30 Hz REF COM/ID tone External AM tone	frequency uncertainty frequency setting range resolution frequency setting range resolution frequency deviation resolution FM error (at deviation 480 Hz) default input frequency setting range resolution	<(0.005 Hz + relative deviation of reference frequency) 10 Hz to 60 Hz 0.1 Hz 5 kHz to 15 kHz 0.1 Hz 0 Hz to 960 Hz 1 Hz <1 Hz 1020 Hz AM EXT 0.1 Hz to 20 kHz 0.1 Hz
Phase (VAR, REF)	default setting range resolution bearing error	0.00° 0° to 360° 0.01° <0.05°

Modulation depth	sum of modulation depths of 30 Hz (VAR) signal, 9.96 kHz FM carrier, COM/ID and external AM signal must not exceed 100 %	
30 Hz (VAR, REF)	setting range AM depth resolution setting uncertainty	0 % to 100 % 0.1 % <0.5 % AM depth at 30 % AM depth
9.96 kHz FM carrier	setting range AM depth resolution setting uncertainty	0 % to 100 % 0.1 % <0.5 % AM depth at 30 % AM depth
COM/ID tone	setting range AM depth resolution setting uncertainty	0 % to 100 % 0.1 % <0.5 % AM depth at 30 % AM depth
External AM tone	setting uncertainty (COM/ID = 1020 Hz) sensitivity	<0.5 % AM depth at 10 % AM depth 0.01 V/%

ILS modulation signal (option R&S SMA-K25)

Attenuator mode AUTO.

ILS-LOC specification valid for carrier frequency range from 108 MHz to 118 MHz

ILS-GS specification valid for carrier frequency range from 329 MHz to 335 MHz

ILS operating modes	ILS-LOC/ILS-GS NORM 90 Hz 150 Hz	standard localizer/glideslope signal + COM/ID tone (can be switched off) suppression of 150 Hz modulation tone suppression of 90 Hz modulation tone
ILS modulation tones	if the frequency of 90 Hz or 150 Hz tone is varied, the other tone is automatically changed in proportion frequency uncertainty	<0.02 Hz + relative deviation of reference frequency
90 Hz tone	frequency setting range resolution	60 Hz to 120 Hz 0.3 Hz
150 Hz tone	frequency setting range resolution	100 Hz to 200 Hz 0.5 Hz
COM/ID tone	default frequency setting range resolution	1020 Hz 0.1 Hz to 20 kHz 0.1 Hz
External AM tone	input	AM EXT
Modulation depth	sum of modulation depths of 90 Hz, 150 Hz, COM/ID and external AM signal must not exceed 100 %	
Sum of depth of modulation (SDM) of 90 Hz tone and 150 Hz tone	setting range AM depth/resolution default, localizer default, glideslope setting uncertainty	0 % to 100 %/0.1 % 40 % 80 % <0.8 % AM depth at 40 % SDM <1.6 % AM depth at 80 % SDM
COM/ID tone	setting range AM depth resolution setting uncertainty (COM/ID = 1020 Hz)	0 % to 100 % 0.1 % <0.5 % AM depth at 10 % AM depth
External AM tone	sensitivity	0.01V/%
Difference in depth of modulation (DDM)	setting range setting resolution setting uncertainty	0 to ± SDM 0.0001 <0.0004 + 1 % of DDM reading
Phase setting	setting range resolution setting uncertainty	0° to 120° 0.01° <0.05°

Marker Beacon (MKR BCN) (option R&S SMA-K25)

Attenuator mode AUTO

MKR-BCN specification valid for carrier frequency range from 74 MHz to 76 MHz

MKR BCN tones	frequency uncertainty	<0.005 Hz + relative deviation of reference frequency
Marker frequencies COM/ID tone	default frequency setting range resolution	400 Hz, 1300 Hz and 3000 Hz 1020 Hz 0.1 Hz to 20 kHz 0.1 Hz

Modulation depth	sum of modulation depths of marker tone and COM/ID signal must not exceed 100 %	
Marker frequency	setting range AM depth resolution default setting uncertainty marker depth = 95 %	0 % to 100 % 0.1 % 95 % <4 %
COM/ID tone	setting range AM depth resolution setting uncertainty COM/ID = 1020 Hz	0 % to 100 % 0.1 % <0.5 % AM depth at 5 % AM depth

ADF mode (option R&S SMA-K25)


The ADF mode provides a carrier frequency of 190 kHz with 30 % AM depth at 1 kHz modulation rate.

ADF tone	frequency uncertainty	<0.005 Hz + relative deviation of reference frequency
ADF frequencies	frequency setting range resolution	0.1 Hz to 20 kHz 0.1 Hz
Modulation depth	setting range AM depth resolution default	0 % to 100 % 0.1 % 30 %

Clock synthesizer (option R&S SMA-B29)

The frequency of the clock synthesizer (option R&S SMA-B29) can be set independently of the RF frequency of the R&S SMA100A. It provides a differential clock signal (AC-coupled, symmetric square) on the rear panel of the R&S SMA100A.

Frequency range	100 kHz to 1.5 GHz	
Resolution of setting	0.01 Hz	
Resolution of synthesis	<100 µHz	
Frequency setting time	to within $<1 \times 10^{-7}$, after IEC/IEEE bus delimiter	
Output voltage (CLK SYN, CLK SYN_N)	into 50Ω , peak to peak, $f = 10$ MHz	
Frequency response	100 kHz to 1.5 GHz both outputs terminated with 50Ω	
Back-feed (from $\geq 50 \Omega$ source)	maximum permissible RF power in output frequency range of CLKSYN path $f > 1$ MHz maximum permissible DC voltage	
Spectral purity		
Nonharmonics	>10 kHz offset from carrier $f \leq 325$ MHz 325 MHz $< f \leq 650$ MHz 650 MHz $< f \leq 1300$ MHz 1300 MHz $< f \leq 1500$ MHz	<-82 dBc <-76 dBc <-70 dBc <-64 dBc
Wideband noise	carrier offset >10 MHz; measurement bandwidth 1 Hz	typ. <-154 dBc
SSB phase noise	carrier offset 20 kHz, measurement bandwidth 1 Hz $f = 100$ MHz $f = 250$ MHz $f = 500$ MHz $f = 1000$ MHz	<-123 dBc, typ. -129 dBc <-113 dBc, typ. -119 dBc <-109 dBc, typ. -115 dBc <-103 dBc, typ. -109 dBc
SSB phase noise with option R&S SMA-B22	carrier offset 20 kHz, measurement bandwidth 1 Hz $f = 100$ MHz $f = 250$ MHz $f = 500$ MHz $f = 1000$ MHz	<-125 dBc, typ. -131 dBc <-115 dBc, typ. -121 dBc <-111 dBc, typ. -117 dBc <-105 dBc, typ. -111 dBc
RMS jitter	carrier frequency 100 MHz 155 MHz 622 MHz	RMS jitter bandwidth 1 Hz to 10 MHz 100 Hz to 1.5 MHz 1 kHz to 5 MHz typ. 300 fs (30 µUI) typ. 220 fs (34 µUI) typ. 190 fs (118 µUI)
RMS jitter with option R&S SMA-B22	carrier frequency 100 MHz 155 MHz 622 MHz	RMS jitter bandwidth 1 Hz to 10 MHz 100 Hz to 1.5 MHz 1 kHz to 5 MHz typ. 220 fs (22 µUI) typ. 160 fs (25 µUI) typ. 140 fs (87 µUI)

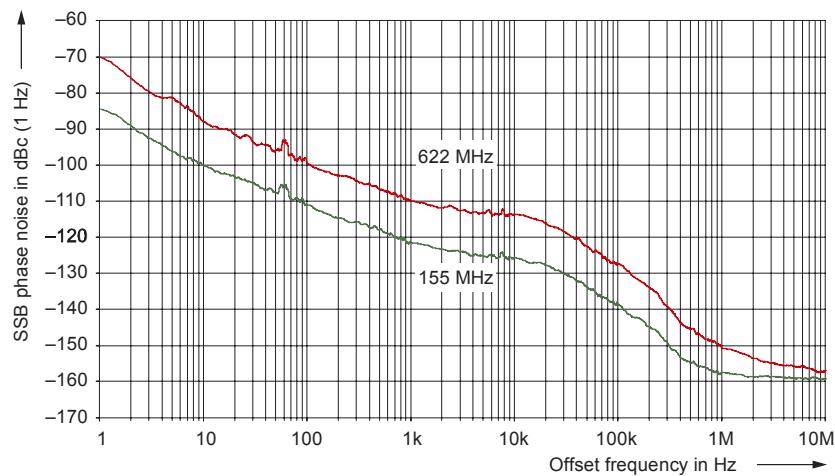

Clock synthesizer (option R&S SMA-B29): SSB phase noise measured with option R&S SMA-B22, typical values

General data

Remote control

Systems	IEC/IEEE bus, in line with IEC 60625 (IEEE 488) Ethernet (TCP/IP) USB		
Command set	SCPI 1999.5 or 8662/63A compatible		
Interfaces	IEC Ethernet USB	24-contact Amphenol Western USB	
IEC/IEEE bus address	0 to 30		
Interface functions IEC	SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0		
LAN interface	10/100baseT		

Operating data

Power supply	input voltage range, AC, nominal	100 V to 240 V (AC) $\pm 10\%$
	AC supply frequency	50 Hz to 400 Hz, $-5\% / +10\%$
	power consumption	250 VA
Power factor correction		EN 61000-3-2
EMC		EN 55011 class B, EN 61326
Immunity to interfering field strength		up to 10 V/m
Environmental conditions	operating temperature range	0 °C to +55 °C EN 60068-2-1, EN 60068-2-2
	storage temperature range	-40 °C to +71 °C
	operating altitude standard with R&S SMA-B46	≤ 3000 m ≤ 4600 m
	climatic resistance, +40 °C/95 % rel. humidity	EN 60068-2-3
Mechanical resistance	vibration, sinusoidal	5 Hz to 150 Hz, max. 2 g at 55 Hz, max. 0.5 g at 55 Hz to 150 Hz, EN 60068-2-6
	vibration, random	10 Hz to 300 Hz, acceleration 1.2 g (rms) meets EN 60068-2-64
	shock	40 g shock spectrum. EN 60068-2-27, MIL-STD-810E
Electrical safety		IEC 61010-1, EN 61010-1, CAN/CSA-C22.2 No. 61010-1-04, UL 61010-1
Certification marks		VDE-GS, cCSA _{US}
Dimensions (W × H × D)		427 mm × 88 mm × 450 mm
Weight	when fully equipped	10 kg
Recommended calibration interval		3 years

Ordering information

Designation	Type	Order No.
Signal Generator ² Including power cable, Quick Start Guide and CD-ROM (with operating and service manual)	R&S SMA100A	1400.0000.02
Options		
RF Path		
9 kHz to 3 GHz with electronic attenuator	R&S SMA-B103	1405.0209.02
9 kHz to 6 GHz with electronic attenuator	R&S SMA-B106	1405.0809.02
9 kHz to 3 GHz without attenuator	R&S SMA-B103L	1405.0609.02
9 kHz to 6 GHz without attenuator	R&S SMA-B106L	1405.1005.02
FM/φM Modulator	R&S SMA-B20	1405.1605.02
Enhanced Phase Noise Performance and FM/φM Modulator	R&S SMA-B22	1405.1805.02
Clock Synthesizer	R&S SMA-B29	1400.2503.02
Operating Altitude up to 4600 m	R&S SMA-B46	1405.1305.02
Removable Mass Storage (compact flash disk)	R&S SMA-B80	1405.2001.02
Rear Connectors	R&S SMA-B81	1405.2401.02
High-Performance Pulse Generator	R&S SMA-K23	1405.2801.02
Multifunction Generator	R&S SMA-K24	1405.2901.02
VOR/ILS Modulation	R&S SMA-K25	1405.3008.02
Recommended extras		
Hardcopy manuals (in English, UK)		1400.0075.32
Hardcopy manuals (in English, US)		1400.0075.39
Spare Compact Flash Card (R&S SMA-B80 required)	R&S SMA-Z10	1405.4004.02
19" Rack Adapter	R&S ZZA-211	1096.3260.00
Keyboard with USB Interface (US characteristic set)	R&S PSL-Z2	1157.6870.04
Mouse with USB Interface, optical	R&S PSL-Z10	1157.7060.03
External USB DVD Drive	R&S PSP-B6	1134.8201.22

² The base unit must be ordered together with an R&S SMA-B103/R&S SMA-B106/R&S SMA-B103L/R&S SMA-B106L frequency option.



For product brochure, see PD 5213.6412.12
and www.rohde-schwarz.com
(search term: SMA100A)


ROHDE & SCHWARZ

www.rohde-schwarz.com

Europe: +49 1805 12 4242, customersupport@rohde-schwarz.com
USA and Canada: 1-888-837-8772, customer.support@rsa.rohde-schwarz.com
Asia: +65 65130488, customersupport.asia@rohde-schwarz.com