

Accessories Home

Search

Product Portfolio


- Oscilloscope Probes
- Logic Analyzer Probes
- Optical Accessories
- Application Software
- Request a Catalog
- Product Finder

Resources

- Application Notes and Technical Documents
- Manuals
- Software & Drivers
- Service & Support
- E-Newsletters

What's New

- Promotions
- News
- Events

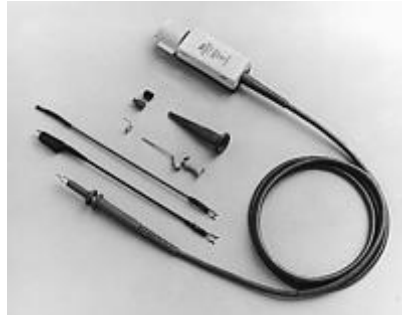

P6205 with Accessories.

Product Information

› **Introduction**

[Characteristics/Specs](#)

[Ordering Information](#)

Pricing Information

[Check List Price](#)

[Request a Quote](#)

Additional Resources

[Find an Authorized Distributor](#)

Active FET Probe

P6205

FEATURES & BENEFITS

P6205

- DC to 750 MHz
- 2 pF Input C
- 1 MO Input R
- Integral Probe Power TEKPROBE BNC

APPLICATIONS

- High-speed Digital Systems Design
 - ECL
 - GaAs
 - MOS: CMOS; FastCMOS; BiCMOS; TTL
- Component Design/Characterization
 - Amplitude levels
 - Aberrations
 - Propagation Delay and Timing
 - Bandwidths and Rise Times
- Educational Research
- Manufacturing Engineering and Test

Active FET Probes for TEKPROBE™ BNC Interface

The P6205 Probe is part of Tektronix' line of Low Circuit Loading Signal Acquisition probes for CSA (Communications Signal Analyzers), DSA (Digitizing Signal Analyzers), 11000 Series and the TDS Family of Oscilloscopes.

The P6205 is designed with FET devices for its inputs, which allows very high input resistance values and low input capacitances.

Both Active FET probes provide a wide linear dynamic input range for accessing most digital device families using today's logic voltage levels.

Power for the P6205 is supplied by the CSA, DSA, TDS and 11000 Series mainframes through the TEKPROBE BNC Interface eliminating the need for extra cabling and/or external power supplies.

Probe information such as type, serial number, attenuation factor, offset scale factor, input resistance and termination resistance required is communicated through the TEKPROBE Interface between the Active Probe and the CSA, DSA and 11000 Series mainframes. This information is used by these oscilloscope mainframes during the scope initialization sequence and measurement analysis.

Benefit Highlights

- **Low Input C, High Input R** – Minimizes circuit under test loading
- **Probe Power Directly from CSA, DSA, TDS or 1100 Series TEKPROBE BNC Interfaces** - Means no additional cables or power supplies required*
- **Readout Coding for 10X Attenuation** – confusion and errors in measurement readings
- **Gold-plated Replaceable Probe Tips** – electrical connections and lower maintenance costs
- **Miniature Size Accessories** – Provides wide range of circuit attachments
- **UL Listed** – UL 1244

[▲ back to top](#)

► **Introduction**

[Characteristics/Specs](#)

[Ordering Information](#)

[Check List Price](#)

[Request a Quote](#)


[Find an Authorized Distributor](#)

CE Marking Not Applicable.



Product(s) are manufactured in ISO registered facilities.

60W-14842-0B, 19-APR-2006

 [Request Sales Contact](#)

 [Request a Demo](#)

 [Email This Page](#)

 [Printable Page](#)

Tektronix Site

[Home](#) | [Products](#) | [Support](#) | [Buy](#) | [Contact Us](#) | [Investors](#) | [Careers](#) | [International](#) | [myTek](#)

© Copyright Tektronix, Inc. | [Terms of Use](#) | [Privacy Statement](#) | [Sitemap](#) |  [Learn More](#)