

RF and Microwave Power Sensors/Meters

Tektronix PSM3000, PSM4000, and PSM5000 Series Data Sheet



Features & Benefits

Key Performance Specifications

- 8 GHz, 18 GHz, 20 GHz, and 26.5 GHz Models
- Models Available with N and 3.5 mm Connectors
- Dynamic Range as Low as -60 dBm and as High as +20 dBm
- Uncertainty as Low as 2.6%
- Reading Rates up to 2000 Readings/s

Features

- Meters are Calibrated over Full Temperature Range – No zero or cal needed before making measurements, saving time and avoiding poor-quality data
- Average Power, Duty Cycle Corrected Pulse Power, and Measurement Logging on All Models

- Included Applications run under Microsoft Windows
 - Power Meter Application
 - High-speed Logging Application
 - LabVIEW Drivers and Programming Examples for Most Common Windows Programming Environments are Available for Automated System Support
- Max Hold and Relative Measurement Modes
- Offset, Frequency Response, and 75 Ω Minimum Loss Pad Correction
- Flexible Averaging Modes for Quick, Stable Measurements
- TTL Trigger Input and Output allow Synchronization with External Instruments
- Pass/Fail Limit Mode
- Compact Size
- The PSM3000 Series offers True Average Power Measurements that Give Accurate Results Regardless of Signal Shape or Modulation
- The PSM4000 and PSM5000 Series offer:
 - Pulse Power, Duty Cycle, Peak Power, and Crest Factor Measurements
 - Measure Peak, Average and Minimum Power on Bursts with Adjustable Offset and Duration
- The PSM5000 Series includes a Pulse Profiling Application for Making Measurements on Repetitive, Pulsed Signals
 - Builds and Displays a Trace of the Pulse Envelope
 - Full-trace and Gated Measurements including Pulse, Peak and Average Power, Overshoot, Crest Factor, Rise and Fall Time, Pulse Width, Pulse Repetition Frequency, Duty Cycle
 - Statistical Measurements on the Trace Data, such as Complementary Cumulative Distribution Function (CCDF), and Probability Density Function (PDF)

Applications

- General-purpose RF and Microwave Average Power Measurements
- Characterization of Repetitive Pulsed Signals, such as Navigation, Weather, and other Radar
- Peak and Average Power Measurements on Modulated Signals such as GSM, CDMA, WCDMA, HSPA, WiMAX up to 10 MHz
- Peak and Average Power Measurements of Modulated Pulsed Communications Signals
- Level Control Feedback for Signal Sources
- Validation and Characterization of Power Amplifiers, Switches, and Other RF and Microwave Components
- Service, Maintenance, and Installation of DTV, Cellular, Microwave Radio Link, and Radio Broadcast Transmitters
- Verification and Calibration of Test Equipment and Systems

3-year Warranty

Capable, Compact Power Sensors/Meters

The PSM3000, PSM4000, and PSM5000 Series are compact power sensors/meters that deliver fast, accurate RF and microwave power measurements. A broad range of CW and pulse modulation measurements are available, depending on the series you choose. Each meter comes with Windows Power Meter application software for controlling the meter, displaying readings, and recording data. The combination of the sensor/meter and PC provides a complete solution, eliminating the need for a separate, dedicated meter mainframe.

No Meter Mainframe Required

With the included power meter application software, familiar meter controls are available at the click of a mouse and readings are presented right on your PC screen. Familiar Windows pull-down menus provide additional controls. Data is immediately available on the PC for further analysis and documentation. The meters communicate with the PC using standard USB 2.0 protocols and cables for plug-and-play ease of use.

Integrate High-speed Power Measurements Into Your Testing

Tektronix PSM Series power sensors feature the industry's fastest measurement speed (2000 readings/s). This can significantly reduce

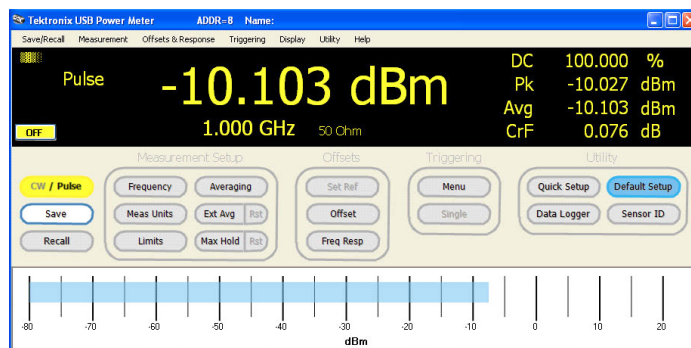


Figure 1 – Software presents familiar controls and measurement presentation.

test times and provide dynamic power measurement information that was previously unavailable. An included High-speed Logging Application provides a mechanism for getting this data into your PC for analysis.

For custom test applications, you can communicate with the sensors using LabVIEW, or using a fully documented API. Example programs are provided for the most commonly used development environments. The communications library allows your program to communicate with up to 12 sensors, eliminating the need for costly switches.

Tektronix real-time signal analyzers, arbitrary waveform generators, and oscilloscopes that use the Windows operating system can also be used to control the PSM Series sensor/meter and give you quick access to accurate power measurements.

To allow synchronization with other measurement equipment all models include Trigger In and Trigger Out TTL signals.

High-speed measurements, extensive programming tools, and synchronization features make these sensors versatile additions to your test setup.

Industry-leading Performance for Demanding Designs

Tektronix power sensors/meters come fully calibrated over their entire operating temperature range. Sensor zeroing and meter reference calibration have been eliminated, reducing setup time and helping to avoid inaccurate results. These meters provide accuracy you can count on for general-purpose CW, peak, pulse, and other modulated power measurements. Whether doing installation or maintenance on a wireless base station, production testing, or R&D for wireless components, the PSM Series products serve these needs with a wide dynamic range (–60 dBm to +20 dBm) and frequencies ranging from 10 MHz up to 26.5 GHz.

Select the Performance/Features to Meet Your Needs

PSM3000 Series power sensors/meters provide true average power measurements, giving accurate power measurements independent of signal modulation and bandwidth. The PSM4000 Series delivers average power (CW) measurements, and adds pulse and peak power measurements for gathering basic data on pulsed RF and microwave signals. PSM5000 Series power sensors/meters provide the same measurements as the PSM4000, and add pulse profiling capability for signal viewing and characterization in pulsed RF and microwave systems.

| Feature | PSM3000 Series | PSM4000 Series | PSM5000 Series |
|--|--------------------|--------------------|--------------------|
| Frequency Range | 10 MHz to 26.5 GHz | 10 MHz to 20 GHz | 50 MHz to 20 GHz |
| Dynamic Range | -55 dBm to +20 dBm | -60 dBm to +20 dBm | -60 dBm to +20 dBm |
| Measurement Speed | 2000 readings/s | 2000 readings/s | 2000 readings/s |
| Measurements | | | |
| True Average Power | X | | |
| Average (CW) Power | | X | X |
| Duty Cycle Corrected Pulse Power | X | X | X |
| Peak Power, Pulse Power, Duty Cycle | | X | X |
| Peak and Average Burst Power | | X | X |
| Measurement Logging | X | X | X |
| Pulse Width, Rise/Fall, Overshoot, Droop | | | X |
| Time Gated Measurements | | | X |
| Pulse Waveform Display with Markers | | | X |

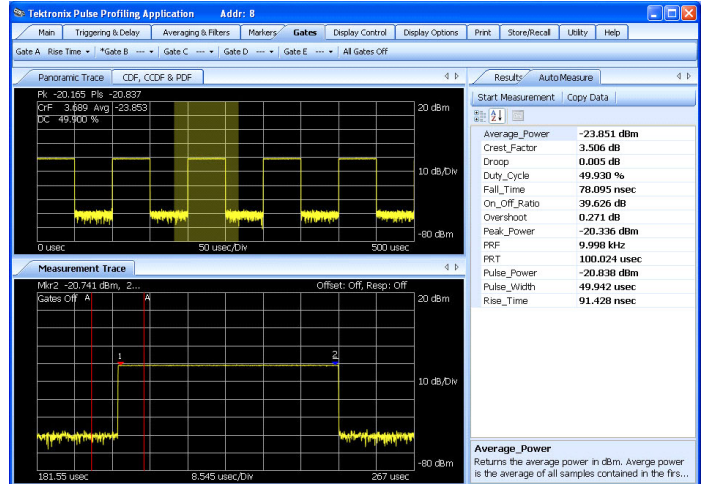


Figure 2 – Pulse profiling software enables a thorough analysis of pulse characteristics.

A Broad Range of Pulse Envelope Measurements

Tektronix PSM5000 Series products feature an easy-to-use, high performance, pulse profiling, pulse (modulation), and CW power meter and sensor in one. The PSM5000 Series product is specifically designed for applications requiring time domain analysis of constant-envelope, repetitive pulsed signals. It performs time domain pulse measurements such as rise/fall time, overshoot, and droop that have typically required costly signal analyzers. PSM5000 Series sensors use an equivalent time-sampling technique to reconstruct repetitive, pulsed input signals. Repetitive pulses with video bandwidths up to 10 MHz can be measured with an effective sample rate of up to 48 MS/s.

Performance You Can Count On

In addition to industry-leading service and support, every PSM Series power sensor/meter comes backed with a three-year standard warranty.

Specifications

Electrical Specifications

All specifications apply over the full instrument operating temperature range unless otherwise noted, after a 20 minute warm-up interval.

PSM3000 Series USB Power Meters (True Average)

| Characteristic | PSM3110 | PSM3120 | PSM3310 | PSM3320 | PSM3510 |
|-------------------------------------|--|---|--|--|--|
| Input Connector | 3.5 mm, male | N-type, male | 3.5 mm, male | N-type, male | 3.5 mm, male |
| Frequency Range | 10 MHz to 8 GHz | | 10 MHz to 18 GHz | | 10 MHz to 26.5 GHz |
| Dynamic Range | -55 dBm to +20 dBm | | | | |
| Video Bandwidth | 100 Hz, typical | | | | |
| Total Accuracy*1 | Total Uncertainty = $2 \times \sqrt{[(CF/2)^2 + (L/2)^2 + (N/2)^2 + (Z/\sqrt{2})^2 + (Mm/\sqrt{2})^2 + (T/\sqrt{2})^2]}$ | | | | |
| Calibration Factor Uncertainty (CF) | 10 MHz to 1 GHz: 2.5% 1 GHz to 8 GHz: 2.4% | 10 MHz to 1 GHz: 1.8% 1 GHz to 8 GHz: 1.7% | 10 MHz to 1 GHz: 2.5% 1 GHz to 10 GHz: 2.4% 10 GHz to 18 GHz: 2.7% | 10 MHz to 1 GHz: 1.8% 1 GHz to 10 GHz: 1.7% 10 GHz to 18 GHz: 1.9% | 10 MHz to 1 GHz: 2.5% 1 GHz to 10 GHz: 2.4% 10 GHz to 18 GHz: 2.7% 18 GHz to 26.5 GHz: 3.7% |
| Linearity Uncertainty (L) | +15 dBm to +20 dBm: 3.0% -15 dBm to +15 dBm: 2.5% -55 dBm to -15 dBm: 2.0% | | | | |
| Noise Uncertainty (N) | 5 second integration +10 dBm to +20 dBm: 0.10% -15 dBm to +10 dBm: 0.25% -30 dBm to -15 dBm: 0.10% -40 dBm to -30 dBm: 0.25% -50 dBm to -40 dBm: 1.50% -55 dBm to -50 dBm: 4.50% | | | | |
| Zero Offset Power*2 (Z) | $[(3.0 \text{ nW at } 25 \text{ }^\circ\text{C}) + \Delta T \times (0.15 \text{ nW / } ^\circ\text{C})] + 0.01 \text{ nW / month}$ | | | | |
| Match*3 | 1.20:1 VSWR (21 dB Return Loss) | | 10 MHz to 10 GHz: 1.20:1 VSWR (21 dB Return Loss) 10 GHz to 18 GHz: 1.29:1 VSWR (18 dB Return Loss) | | 10 MHz to 10 GHz: 1.20:1 VSWR (21 dB Return Loss) 10 GHz to 26.5 GHz: 1.29:1 VSWR (18 dB Return Loss) |
| Temperature Uncertainty (T) | 40 °C < T ≤ 50 °C: 2.00% 30 °C < T ≤ 40 °C: 0.75% 20 °C < T ≤ 30 °C: 0.00% 10 °C < T ≤ 20 °C: 0.75% 0 °C < T ≤ 10 °C: 2.00% | | | | |

*1 Total uncertainty includes contributions from Calibration Factor Uncertainty (CF), Linearity Uncertainty (L), Noise Uncertainty (N), Zero Offset Uncertainty (Z), Mismatch Uncertainty, and Temperature Uncertainty (T). All error terms must be converted to percentages for Total Uncertainty (RSS) calculation. Mismatch Uncertainty (Mm) requires knowledge of source match and should be expressed as a percentage using the equation $Mm = 100 \times [(1 \pm \Gamma_{\text{source}} \times \Gamma_{\text{sensor}})^2 - 1]$.

*2 Use the following formula to determine Zero Offset Uncertainty as a percentage: $Z = (\text{Zero Offset Power} / \text{Nominal Power}) \times 100$.

*3 Nominal impedance = 50 Ω.

PSM4000 Series USB Power Meters (Average/Peak/Pulse)

| Characteristic | PSM4110 | PSM4120 | PSM4320 | PSM4410 |
|-------------------------------------|--|---|--|--|
| Input Connector | 3.5 mm, male | N-type, male | N-type, male | 3.5 mm, male |
| Frequency Range | 10 MHz to 8 GHz | 10 MHz to 8 GHz | 50 MHz to 18.6 GHz | 50 MHz to 20 GHz |
| Dynamic Range | 10 MHz to 6 GHz: -60 dBm to +20 dBm 6 GHz to 8 GHz: -50 dBm to +20 dBm | | -40 dBm to +20 dBm | |
| Maximum Peak-to-Average Ratio | 10 MHz to 6 GHz: 80 dB 6 GHz to 8 GHz: 70 dB | | 55 dB | |
| Internal Video Bandwidth | 10 MHz, typical | | | |
| Timebase | ±50 ppm, typical | | | |
| Sample Rate | 500 kS/s | | | |
| Average Power, Minimum Pulse Width | 500 ns, typical | | | |
| Peak Power, Minimum Pulse Width | 200 ns, typical | | | |
| Total Accuracy*1 | Total Uncertainty = $2 \times \sqrt{[(CF/2)^2 + (L/2)^2 + (N/2)^2 + (Z/\sqrt{2})^2 + (Mm/\sqrt{2})^2 + (T/\sqrt{2})^2]}$ | | | |
| Calibration Factor Uncertainty (CF) | 10 MHz to 100 MHz: 7.0% 100 MHz to 500 MHz: 4.0% 500 MHz to 8 GHz: 2.5% | 10 MHz to 100 MHz: 7.0% 100 MHz to 500 MHz: 4.0% 500 MHz to 8 GHz: 1.7% | 50 MHz to 500 MHz: 4.0% 500 MHz to 10 GHz: 1.7% 10 GHz to 18.6 GHz: 1.9% | 50 MHz to 500 MHz: 4.0% 500 MHz to 12.5 GHz: 2.6% 12.5 GHz to 18 GHz: 3.2% 18 GHz to 20 GHz: 3.5% |
| Linearity Uncertainty (L) | 10 MHz to 100 MHz +15 dBm to +20 dBm: 7.0% +10 dBm to +15 dBm: 5.0% -60 dBm to +10 dBm: 4.0% 100 MHz to 2 GHz +15 dBm to +20 dBm: 7.0% +10 dBm to +15 dBm: 5.0% -60 dBm to +10 dBm: 3.0% 2 GHz to 8 GHz +15 dBm to +20 dBm: 5.0% +10 dBm to +15 dBm: 3.0% -60 dBm to +10 dBm: 2.0% | | 50 MHz to 100 MHz +15 dBm to +20 dBm: 7.0% -40 dBm to +15 dBm: 5.0% 100 MHz to 2 GHz +15 dBm to +20 dBm: 7.0% +5 dBm to +15 dBm: 5.0% -40 dBm to +5 dBm: 3.0% 2 GHz to 20 GHz +15 dBm to +20 dBm: 6.0% +5 dBm to +15 dBm: 4.0% -40 dBm to +5 dBm: 2.0% | |
| Noise Uncertainty (N) | 1 second integration +10 dBm to +20 dBm: 0.22% (10 MHz to 100 MHz) 0.15% (100 MHz to 8 GHz) -30 dBm to +10 dBm: 0.22% (10 MHz to 100 MHz) 0.04% (100 MHz to 8 GHz) -50 dBm to -30 dBm: 0.22% (10 MHz to 100 MHz) 0.04% (100 MHz to 6 GHz) 0.15% (6 GHz to 8 GHz) -60 dBm to -50 dBm: 0.44% (10 MHz to 100 MHz) 0.15% (100 MHz to 6 GHz) | | 5 second integration +10 dBm to +20 dBm: 1.5% (50 MHz to 20 GHz) -20 dBm to +10 dBm: 1.0% (50 MHz to 20 GHz) -30 dBm to -20 dBm: 1.5% (50 MHz to 20 GHz) -40 dBm to -30 dBm: 7.0% (50 MHz to 18.6 GHz) | |
| Zero Offset Power*2 (Z) | [(0.35 nW at 25 °C) + ΔT × (0.025 nW / °C)] + 0.005 nW / month | | 50 MHz to 500 MHz [(200 nW at 25 °C) + ΔT × (10 nW / °C)] + 10 nW / month 500 MHz to 20 GHz [(100 nW at 25 °C) + ΔT × (5 nW / °C)] + 5 nW / month | |
| Match*3 | 1.09:1 VSWR (27 dB Return Loss) | 1.15:1 VSWR (23 dB Return Loss) | 50 MHz to 10 GHz: 1.20:1 VSWR (21 dB Return Loss) 10 GHz to 18.6 GHz: 1.29:1 VSWR (18 dB Return Loss) | 50 MHz to 10 GHz: 1.20:1 VSWR (21 dB Return Loss) 10 GHz to 20 GHz: 1.29:1 VSWR (18 dB Return Loss) |

| Characteristic | PSM4110 | PSM4120 | PSM4320 | PSM4410 |
|-----------------------------|--|---------|--------------------------|--------------------------|
| Temperature Uncertainty (T) | 40 °C < T ≤ 50 °C: 1.00% (plus 1%, 0 dBm to 10 dBm; plus 3%, 10 dBm to 20 dBm) | | 40 °C < T ≤ 50 °C: 6.00% | 30 °C < T ≤ 40 °C: 3.00% |
| | 30 °C < T ≤ 40 °C: 0.75% (plus 1%, 0 dBm to 10 dBm; plus 3%, 10 dBm to 20 dBm) | | 20 °C < T ≤ 30 °C: 0.00% | 10 °C < T ≤ 20 °C: 3.00% |
| | 20 °C < T ≤ 30 °C: 0.00% | | 0 °C < T ≤ 10 °C: 6.00% | |
| | 10 °C < T ≤ 20 °C: 0.75% (plus 1%, 0 dBm to 10 dBm; plus 3%, 10 dBm to 20 dBm) | | | |
| | 0 °C < T ≤ 10 °C: 1.00% (plus 1%, 0 dBm to 10 dBm; plus 3%, 10 dBm to 20 dBm) | | | |

*1 Total uncertainty includes contributions from Calibration Factor Uncertainty (CF), Linearity Uncertainty (L), Noise Uncertainty (N), Zero Offset Uncertainty (Z), Mismatch Uncertainty, and Temperature Uncertainty (T). All error terms must be converted to percentages for Total Uncertainty (RSS) calculation. Mismatch Uncertainty (Mm) requires knowledge of source match and should be expressed as a percentage using the equation $Mm = 100 \times [(1 \pm \Gamma_{source} \times \Gamma_{sensor})^2 - 1]$.

*2 Use the following formula to determine Zero Offset Uncertainty as a percentage: $Z = (\text{Zero Offset Power} / \text{Nominal Power}) \times 100$.

*3 Nominal impedance = 50 Ω.

PSM5000 Series USB Power Meters (Average/Peak/Pulse + Profiling)

| Characteristic | PSM5110 | PSM5120 | PSM5320 | PSM5410 |
|--|--|--|--|--|
| Input Connector | 3.5 mm, male | N-type, male | N-type, male | 3.5 mm, male |
| Frequency Range | 100 MHz to 8 GHz | | 50 MHz to 18.6 GHz | 50 MHz to 20 GHz |
| Dynamic Range | 100 MHz to 6 GHz: -60 dBm to +20 dBm 6 GHz to 8 GHz: -50 dBm to +20 dBm | | -40 dBm to +20 dBm | |
| Maximum Peak-to-Average Ratio | 100 MHz to 6 GHz: 80 dB 6 GHz to 8 GHz: 70 dB | | 55 dB | |
| Internal Video Bandwidth | | | 10 MHz, typical | |
| Timebase | | | ±50 ppm, typical | |
| Real-time Sample Rate | | | 500 kS/s | |
| Average Power, Minimum Pulse Width | | | 500 ns, typical | |
| Peak Power, Minimum Pulse Width | | | 200 ns, typical | |
| Pulse Profiling, Maximum Equivalent-time Sample Rate*4 | | | 48 MS/s | |
| Pulse Profiling, Minimum Rise Time, 10% to 90% | | | 54 ns (-70 dBm to -20 dBm pulse, 4 GHz) | |
| Pulse Profiling, Minimum Fall Time, 90% to 10% | | | 44 ns (-70 dBm to -20 dBm pulse, 4 GHz) | |
| Pulse Profiling, Manual Trigger Level Accuracy | | | ±1 dBm | |
| Pulse Profiling, Minimum Number of Cycles | | | 2 cycles | |
| Pulse Profiling, Video Filters | | | 100 kHz, 200 kHz, 300 kHz, 500 kHz, 1 MHz, 2 MHz, 3 MHz, 5 MHz, 10 MHz | |
| Total Accuracy*1 | Total Uncertainty = $2 \times \sqrt{[(CF/2)^2 + (L/2)^2 + (N/2)^2 + (Z/\sqrt{2})^2 + (Mm/\sqrt{2})^2 + (T/\sqrt{2})^2]}$ | | | |
| Calibration Factor Uncertainty (CF) | 100 MHz to 500 MHz: 4.0% 500 MHz to 8 GHz: 2.5% | 100 MHz to 500 MHz: 4.0% 500 MHz to 8 GHz: 1.7% | 50 MHz to 500 MHz: 4.0% 500 MHz to 10 GHz: 1.7% 10 GHz to 18.6 GHz: 1.9% | 50 MHz to 500 MHz: 4.0% 500 MHz to 12.5 GHz: 2.6% 12.5 GHz to 18 GHz: 3.2% 18 GHz to 20 GHz: 3.5% |
| Linearity Uncertainty (L) | 100 MHz to 2 GHz +15 dBm to +20 dBm: 7.0% +5 dBm to +15 dBm: 5.0% -60 dBm to +5 dBm: 3.0% | | 50 MHz to 100 MHz +15 dBm to +20 dBm: 7.0% -40 dBm to +15 dBm: 5.0% | |
| | 2 GHz to 8 GHz +15 dBm to +20 dBm: 5.0% +5 dBm to +15 dBm: 3.0% -60 dBm to +5 dBm: 2.0% | | 100 MHz to 2 GHz +15 dBm to +20 dBm: 7.0% +5 dBm to +15 dBm: 5.0% -40 dBm to +5 dBm: 3.0% | |
| | | | 2 GHz to 20 GHz +15 dBm to +20 dBm: 6.0% +5 dBm to +15 dBm: 4.0% -40 dBm to +5 dBm: 2.0% | |

| Characteristic | PSM5110 | PSM5120 | PSM5320 | PSM5410 |
|-----------------------------|---|---|--|--|
| Noise Uncertainty (N) | 1 second integration +10 dBm to +20 dBm: 0.15% (100 MHz to 8 GHz) -30 dBm to +10 dBm: 0.04% (100 MHz to 8 GHz) -50 dBm to -30 dBm: 0.04% (100 MHz to 6 GHz) 0.15% (6 GHz to 8 GHz) -60 dBm to -50 dBm: 0.15% (100 MHz to 6 GHz) | | 5 second integration +10 dBm to +20 dBm: 1.5% (50 MHz to 20 GHz) -20 dBm to +10 dBm: 1.0% (50 MHz to 20 GHz) -30 dBm to -20 dBm: 1.5% (50 MHz to 20 GHz) -40 dBm to -30 dBm: 7.0% (50 MHz to 18.6 GHz) | |
| Zero Offset Power*2 (Z) | $[(0.35 \text{ nW at } 25 \text{ }^\circ\text{C}) + \Delta T \times (0.025 \text{ nW / }^\circ\text{C})] + 0.005 \text{ nW / month}$ | | 50 MHz to 500 MHz $[(200 \text{ nW at } 25 \text{ }^\circ\text{C}) + \Delta T \times (10 \text{ nW / }^\circ\text{C})] + 10 \text{ nW / month}$ 500 MHz to 20 GHz $[(100 \text{ nW at } 25 \text{ }^\circ\text{C}) + \Delta T \times (5 \text{ nW / }^\circ\text{C})] + 5 \text{ nW / month}$ | |
| Match*3 | 100 MHz to 250 MHz: 1.18:1 VSWR (21.7 dB Return Loss) 250 MHz to 8 GHz: 1.09:1 VSWR (23 dB Return Loss) | 100 MHz to 250 MHz: 1.18:1 VSWR (21.7 dB Return Loss) 250 MHz to 8 GHz: 1.15:1 VSWR (27 dB Return Loss) | 50 MHz to 10 GHz: 1.20:1 VSWR (21 dB Return Loss) 10 GHz to 18.6 GHz: 1.29:1 VSWR (18 dB Return Loss) | 50 MHz to 10 GHz: 1.20:1 VSWR (21 dB Return Loss) 10 GHz to 20 GHz: 1.29:1 VSWR (18 dB Return Loss) |
| Temperature Uncertainty (T) | 40 °C < T ≤ 50 °C: 1.00% (plus 1%, 0 dBm to 10 dBm; plus 3%, 10 dBm to 20 dBm) 30 °C < T ≤ 40 °C: 0.75% (plus 1%, 0 dBm to 10 dBm; plus 3%, 10 dBm to 20 dBm) 20 °C < T ≤ 30 °C: 0.00% 10 °C < T ≤ 20 °C: 0.75% (plus 1%, 0 dBm to 10 dBm; plus 3%, 10 dBm to 20 dBm) 0 °C < T ≤ 10 °C: 1.00% (plus 1%, 0 dBm to 10 dBm; plus 3%, 10 dBm to 20 dBm) | | 40 °C < T ≤ 50 °C: 6.00% 30 °C < T ≤ 40 °C: 3.00% 20 °C < T ≤ 30 °C: 0.00% 10 °C < T ≤ 20 °C: 3.00% 0 °C < T ≤ 10 °C: 6.00% | |

*1 Total uncertainty includes contributions from Calibration Factor Uncertainty (CF), Linearity Uncertainty (L), Noise Uncertainty (N), Zero Offset Uncertainty (Z), Mismatch Uncertainty, and Temperature Uncertainty (T). All error terms must be converted to percentages for Total Uncertainty (RSS) calculation. Mismatch Uncertainty (Mm) requires knowledge of source match and should be expressed as a percentage using the equation $Mm = 100 \times [(1 \pm \Gamma_{\text{source}} \times \Gamma_{\text{sensord}})^2 - 1]$.

*2 Use the following formula to determine Zero Offset Uncertainty as a percentage: $Z = (\text{Zero Offset Power} / \text{Nominal Power}) \times 100$.

*3 Nominal impedance = 50 Ω.

*4 Equivalent-time Sampling requires repetitive pulses for accurate results.

General Specifications

| Characteristic | Description |
|--------------------------|---|
| Maximum Average Power | +20 dBm (100 mW) Damage Level: +23 dBm (200 mW) |
| Maximum Pulse Power | +20 dBm (100 mW) Damage Level: +23 dBm (200 mW) |
| Measurement Rate | 2000/s (100 settled measurements per second typical) |
| Trigger In / Trigger Out | TTL compatible Damage Level: 5.5 V max, -0.5 V min Rate: 1 Hz to 750 kHz, typical |
| USB Interface | USB Version: 2.0 Full speed (11 Mb/s) |

System Requirements for Meter and High Speed Logger Software

| Characteristic | Description |
|-----------------------------|---|
| Typical Host Specifications | - 2 GB RAM - USB 2.0 Port |
| Operating System | - Windows XP, Service Pack 3 - Windows Vista - Windows 7 (32-bit, 64-bit, or XP mode) |

Environmental

| Characteristic | Description |
|-------------------------------|---|
| Temperature | |
| Operating | 0 °C to +55 °C |
| Nonoperating | -25 °C to +85 °C |
| Humidity | |
| Operating | 15% to 95% RH (Relative Humidity) at up to +30 °C 15% to 45% RH above +30 °C up to +55 °C; noncondensing |
| Nonoperating | 15% to 95% RH at up to +30 °C 15% to 45% RH above +30 °C up to +85 °C; noncondensing |
| Altitude | |
| Operating | 3,000 m (10,000 ft.) |
| Nonoperating | 15,000 m (50,000 ft.) |
| Electromagnetic Compatibility | EMC Directive 2004/108/EC, EN 61326-2-1: 2006, CE |

Physical Characteristics

| Dimension | Description |
|---|---------------------------------|
| PSM3110, PSM3120, PSM3310, PSM3320, PSM3510, PSM4320, PSM4410, PSM5320, PSM5410 | |
| Diameter | 48 mm (1.9 in.) |
| Length | 74 mm (2.9 in.), plus connector |
| PSM4110, PSM4120, PSM5110, PSM5120 | |
| Diameter | 48 mm (1.9 in.) |
| Length | 62 mm (2.4 in.), plus connector |
| Weight | |
| PSM3110 PSM3310 PSM3510 | 164 g (5.78 oz.) |
| PSM3120 PSM3320 | 203 g (7.16 oz.) |
| PSM4110 PSM5110 | 110 g (3.88 oz.) |
| PSM4120 PSM5120 | 149 g (5.26 oz.) |
| PSM4320 PSM5320 | 163 g (5.75 oz.) |
| PSM4410 PSM5410 | 124 g (4.37 oz.) |

Warranty and Calibration

| Characteristic | Description |
|----------------------------------|-------------|
| Warranty | 3 years |
| Recommended Calibration Interval | 1 year |

Ordering Information**Models**

| Model | Description |
|---------|--|
| PSM3110 | USB Power Sensor/Meter, 10 MHz to 8 GHz, True Average, 3.5 mm male |
| PSM3120 | USB Power Sensor/Meter, 10 MHz to 8 GHz, True Average, N-male |
| PSM3310 | USB Power Sensor/Meter, 10 MHz to 18 GHz, True Average, 3.5 mm male |
| PSM3320 | USB Power Sensor/Meter, 10 MHz to 18 GHz, True Average, N-male |
| PSM3510 | USB Power Sensor/Meter, 10 MHz to 26.5 GHz, True Average, 3.5 mm male |
| PSM4110 | USB Power Sensor/Meter, 10 MHz to 8 GHz, Peak and Pulse, 3.5 mm male |
| PSM4120 | USB Power Sensor/Meter, 10 MHz to 8 GHz, Peak and Pulse, N-male |
| PSM4320 | USB Power Sensor/Meter, 50 MHz to 18 GHz, Peak and Pulse, N-male |
| PSM4410 | USB Power Sensor/Meter, 50 MHz to 20 GHz, Peak and Pulse, 3.5 mm male |
| PSM5110 | USB Power Sensor/Meter, 100 MHz to 8 GHz, Pulse Profiling, 3.5 mm male |
| PSM5120 | USB Power Sensor/Meter, 100 MHz to 8 GHz, Pulse Profiling, N-male |
| PSM5320 | USB Power Sensor/Meter, 50 MHz to 18 GHz, Pulse Profiling, N-male |
| PSM5410 | USB Power Sensor/Meter, 50 MHz to 20 GHz, Pulse Profiling, 3.5 mm male |

Includes: USB Power Sensor/Meter, certificate of traceable calibration, calibration data report, 2-meter USB cable, Installation and Safety Manual, USB flash drive. (The flash drive includes user manuals in English, French, German, Italian, Japanese, Korean, Portuguese, Russian, Simplified Chinese, Spanish, Traditional Chinese, and a Technical Reference Manual and Programmer Manual in English.)

Service Options

| Option | Description |
|--------|-----------------------------|
| C3 | Calibration Service 3 Years |
| C5 | Calibration Service 5 Years |
| R5 | Repair Service 5 Years |

Recommended Accessories

| Accessory | Description |
|-------------|---|
| 174-6150-00 | USB Cable, 2 m, 20 AWG |
| 174-6164-00 | SMB Female to BNC Male, 1 m Trigger Cable |
| 348-2013-00 | Replacement rubber boot |

Contact Tektronix:

ASEAN / Australasia (65) 6356 3900
Austria 00800 2255 4835*
Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Belgium 00800 2255 4835*
Brazil +55 (11) 3759 7627
Canada 1 800 833 9200
Central East Europe and the Baltics +41 52 675 3777
Central Europe & Greece +41 52 675 3777
Denmark +45 80 88 1401
Finland +41 52 675 3777
France 00800 2255 4835*
Germany 00800 2255 4835*
Hong Kong 400 820 5835
India 000 800 650 1835
Italy 00800 2255 4835*
Japan 81 (3) 6714 3010
Luxembourg +41 52 675 3777
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Middle East, Asia, and North Africa +41 52 675 3777
The Netherlands 00800 2255 4835*
Norway 800 16098
People's Republic of China 400 820 5835
Poland +41 52 675 3777
Portugal 80 08 12370
Republic of Korea 001 800 8255 2835
Russia & CIS +7 (495) 7484900
South Africa +41 52 675 3777
Spain 00800 2255 4835*
Sweden 00800 2255 4835*
Switzerland 00800 2255 4835*
Taiwan 886 (2) 2722 9622
United Kingdom & Ireland 00800 2255 4835*
USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

Updated 10 February 2011

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com



Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

28 Dec 2011

3GW-27137-1

